

Milling machine type TM



Best
Price

Standard with 3-axis digital read-out and X, Y & Z-axis with power feed

Standard equipment :

- All 3 axes with power feed
- Pneumatic tool draw clamping
- Coolant system
- 3-axis digital read-out
- Central lubrication
- Halogen work light
- Cast iron column for heavy duty
- Interlock guarding of table and spindles

Automatic spindle feed
with 3 speeds: 0,04; 0,08
and 0,15 mm / rpm.

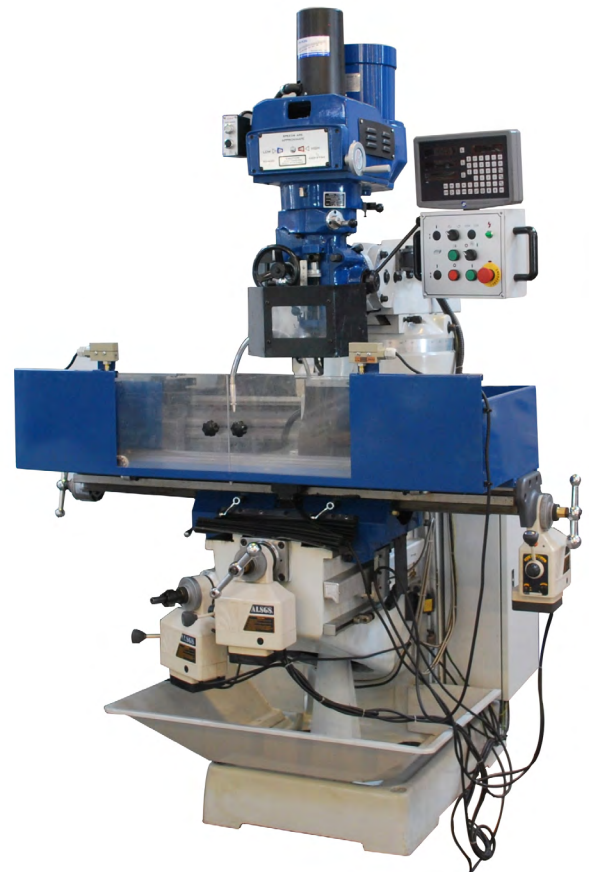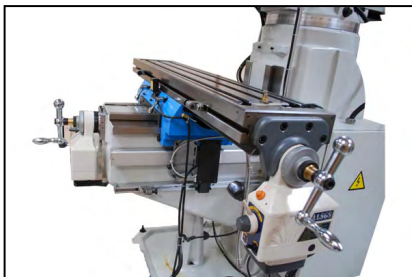

TM 240

Data		TM240V	TM270V	TM300V
Art. No.		17730	17735	17740
Motor	kW	2,2	3,75	3,75
Head swivel		Left/Right: 90° Forward/Back: 45°	Left/Right: 90° Forward/Back: 45°	Left/Right: 90° Forward/Back: 45°
Spindle taper		NT 40	NT 40	NT 40
Spindle speed.		Var. 68-3600 o/min	70-3600 o/min	70-3600 o/min
Spindle feed		3 speed. 0,04; 0,08 & 0,15	3 speed. 0,04; 0,08 & 0,15	3 speed. 0,04; 0,08 & 0,15
Spindle stroke		mm 127	127	127
Table size		mm 1244x230	1371x254	1500x305
Table travel X-Y-Z		mm 840x305x405	860x420x400	930x380x380
Weight		1100	1600	1750