
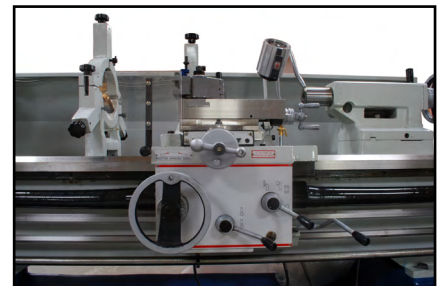


# Lathe type GH 1860

Best  
Price

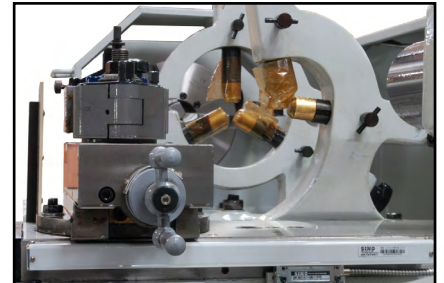

**Type GH-1860** precision lathe with hardened and ground bedways and gears. With Camlock spindle nose for quick change of chucks, foot brake and halogen work lamp. Cast-iron stand. Jog button switch for easy spindle speed selection. Gap bed allows larger diameter work. Gear runs in oil bath. Practical central location of controls.

**Standard with digital read-out and quick change tool post!**

## Standard equipment:

- Digital read-out, 2-axis
- Quick change tool post
- Foot brake
- Coolant system
- Work light
- D1- 8 Camlock system
- 3-jaw chuck
- 4-jaw independent chuck
- Face chuck
- Steady and follow rest
- Splash guard
- Hardened and ground "V" beds
- Chuck guard

Data		GH-1860
Art. No.		17830
Distance btw. centers	mm	1500
Width of bed	mm	340
Center height	mm	230
Swing over cross slide	mm	274
Swing over gap	mm	690
Spindle bore	mm	80
Spindle taper		MT 6
Tailstock taper		MT 4
Spindle speed	RPM	(12) 40 - 1600
Metric thread	mm	(41) 0,1 - 14
Inch thread	TPI	(60) 2 - 112
Motor	kW	7,5
Weight	kg	2830