


Lathe type GH 660

Best
Price

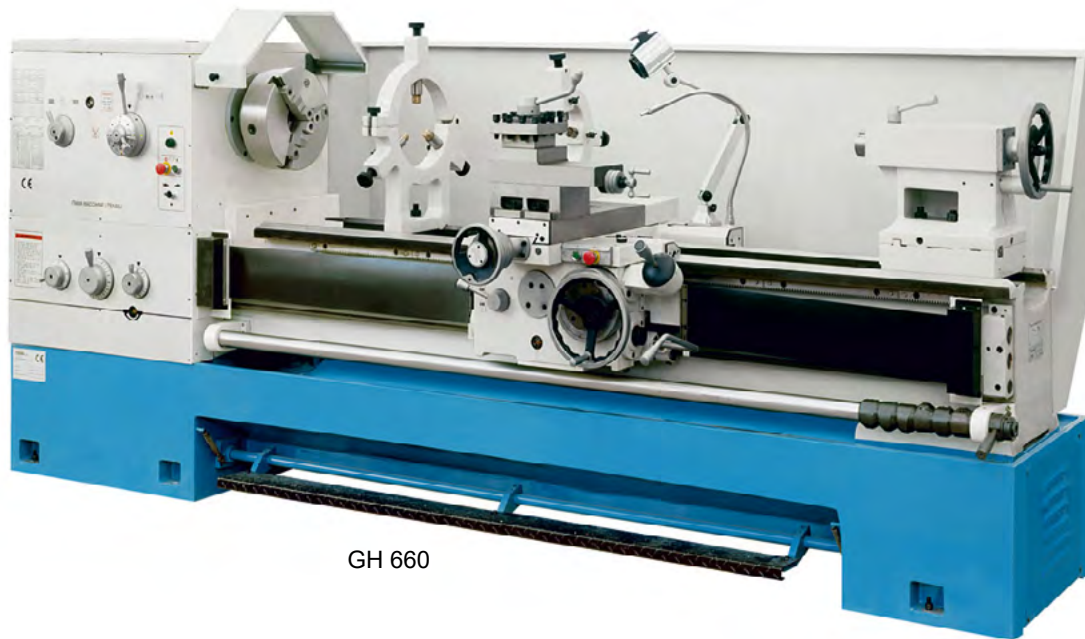

GH 660

Type GH 660 precision lathe with hardened and ground bedways and gears. With Camlock spindle nose for quick change of chucks, foot brake and halogen work lamp. Cast-iron stand. Jog button switch for easy spindle speed selection. Gap bed allows larger diameter work. Gear runs in oil bath. Practical central location of controls.

Standard with digital read-out and quick change tool post 40 positions.

Standard:

- Digital read-out, 2 axis
- Quick change tool post, 40 pos.
- Foot brake
- Coolant system
- Work light
- D 1-8 Camlock system
- 3-jaw chuck Ø 325 mm
- 4-jaw chuck Ø 400 mm
- Face chuck Ø 630 mm
- Steady and follow rest
- Splash guard
- Hardened and ground "V" beds
- Chuck guard



Data		GH-660
Art. No.		17840
Center height	mm	330
Swing over cross slide	mm	420
Swing over gap	mm	870
Distance btw. centers	mm	2000
Width of bed	mm	405
Spindle bore	mm	Ø105
Spindle speed	RPM	(12) 36-1600
Spindle taper		MT 1:20
Tailstock taper		MT 5
Metric thread	mm	(22) 1-14
Inch thread	TPI	(25) 2-28
Motor	kW	10
Weight	kg	3870